
Füllstandssensor / Level sensor
BAUREIHE R / SERIES R

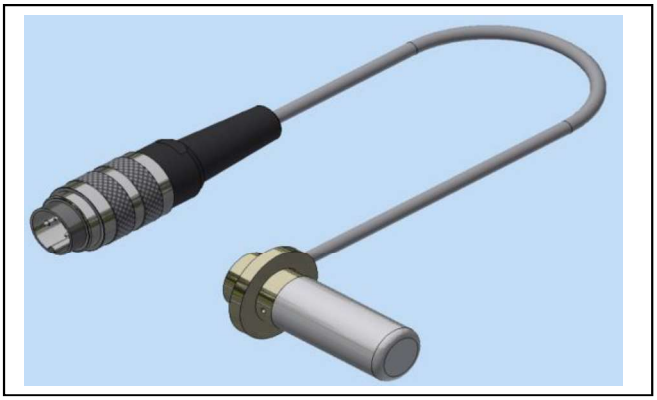

Art.-Nr. : 130 61
Typ : R2T-3/5L20
Eigenschaft : Eintauchsensor mit einem Schaltpunkt


Part-No. : 130 61
Type : R2T-3/5L20
Feature : Immersion sensor with one switching point

TECHNISCHE DATEN

Temperaturbereich Sensor	: -10°C bis 250°C
Temperaturbereich Kabel	: -10°C bis 200° C
Material	: PTFE / MS58 vernickelt
Kabellänge inkl. Stecker	: ca. 1990 mm
Stecker	: 3-polig DIN 41524
Zubehör	: ---
Verwendung mit	: Schaltverstärker der Baureihen CLS, CLC, CSV, DLC10, DLC22
Aktive Zone / Schaltbereich bezogen auf Sensorspitze	**: 2 – 25 mm**
Einbaulage	**:** vertikal/horizontal

TECHNICAL DATA

Ambient temperature sensor	: -10°C to 250°C
Ambient temperature cable	: -10°C to 200°C
Material	: PTFE / MS58 nickel plated
Cable length incl. plug	: ca. 1990 mm
Plug in	: 3-phase DIN41524
Equipment	: ---
Useable with	: Switching amplifier series CLS, CLC, CSV DLC10, DLC22
Active zone / Switching range: 2 – 25 mm related to probe tip	
Mounting position	**:** vertical/horizontal

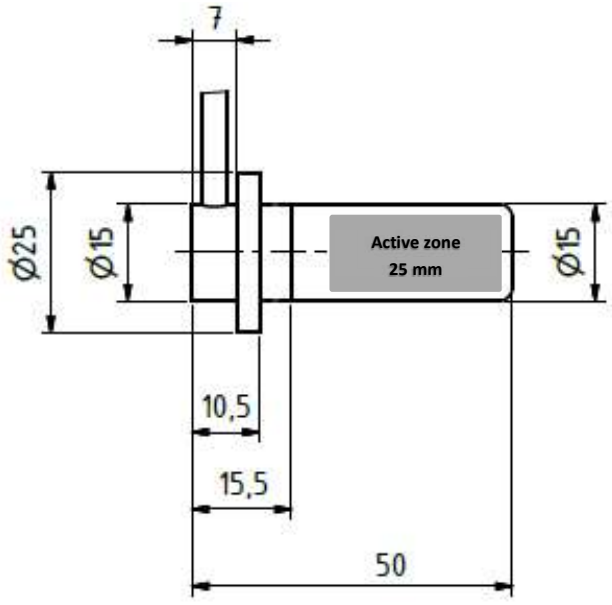

SENOTEC OCHMANN GMBH | OTTO-VON-GUERICKE-STR. 20 | 53757 SANKT AUGUSTIN | GERMANY
TELEFON +49 (22 41) 25 188-0 | TELEFAX +49 (22 41) 25 188-22 | INFO@SENOTEC.DE | WWW.SENOTEC.DE